

# DUO OMEGA | FACT SHEET

Our bestseller




**avantgarde**  
ACOUSTIC

# DUO OMEGA | FACT SHEET

Our bestseller

## DUO OMEGA

107 dB sensitivity  
18 ohm omega drivers with neodymium magnet  
27 inch spherical midrange horn  
CDC system with no crossover  
100V CPC crossover (patent pend.)  
Bass with active feedback control  
2 x 10 inch neodymium bass drivers  
250 watt subwoofer amplifier with 60.000  $\mu$ F



### THE SYSTEM

Based on the classic Duo, the new Duo omega is a super speaker combining extreme power with the pioneering Omega and CPC technology by Avantgarde Acoustic™.

The Duo is a passive 2-way spherical horn speaker system combined with the integrated active subwoofer Sub 225.

Its ultra high sensitivity of 107 dB (W/m) at 18 ohms system impedance and its hybrid concept with the self-powered 250 Watt subwoofer makes it very easy to drive with any amplifier. Even with low powered tube amps the Duo is able to deliver a powerful, dynamic and three-dimensional sound, as the power-demanding work at low frequencies is managed by the active subwoofer.



# DUO OMEGA TECHNOLOGY

Our bestseller



## OMEGA TECHNOLOGY

To significantly improve the sound quality Avantgarde Acoustic™'s *Omega* approach is based on two major concepts: simplification of the passive crossover design and high impedance voice coils.

Different to 2nd order conventional passive crossover with six components for a 2-way speaker, the Duo Omega crossover has only two components for the tweeter and no component for the midrange. Using no crossover in the midrange is usually not easy




due to the large overlapping of the frequency response. Using their "Controlled Dispersion Characteristic" of the driver/horn configuration, Avantgarde Acoustic™ effectively controls the output.

This is how CDC works: The lower cut-off frequency of a horn loudspeaker is determined by the size of the horn. The larger the horn, the lower the response. Below the cut-off frequency of the horn, the response falls off steeply at 18 dB/octave. Avantgarde Acoustic™ speakers thus operate only down to their cut-off frequency limit and require no high pass filters. The upper

frequency response is determined by the driver. However, it can as well be influenced acoustically by the horn. For this purpose, Avantgarde Acoustic™ places a small chamber between the driver's membrane and the horn throat. The driver does not emit directly but via a small air chamber into the horn throat opening. This air volume operates as a kind of band-pass filter and automatically filters frequencies above the resonance volume of the chamber (at 6 dB/oct.). By choosing an adequate driver with a natural roll-off at 6 dB in this frequency range, Avantgarde Acoustic™ obtains an acoustic attenuation of the frequency response of 12 dB without any passive frequency crossover. No further low pass filters are necessary! The CDC system thus causes the midrange to only operate within their operational band and steeply fall off at the transition points.




The attached graphics show the difference of conventional and the new Omega voice coils. To achieve very high resistance the voice coils of the Omega drivers are made with very long but very thin wires. Up to four windings are placed on the voice coil former. Elaborate production technology is required as the wire is so thin and easily breaks and the voice coil gap is so narrow. Now, why is the horn manufacturer taking so much energy and effort to simplify the passive crossovers and enhancing the impedance of their voice coils?.

The key point is the damping factor. Damping factor is the technical term for the ability of an amplifier to control the movement of the

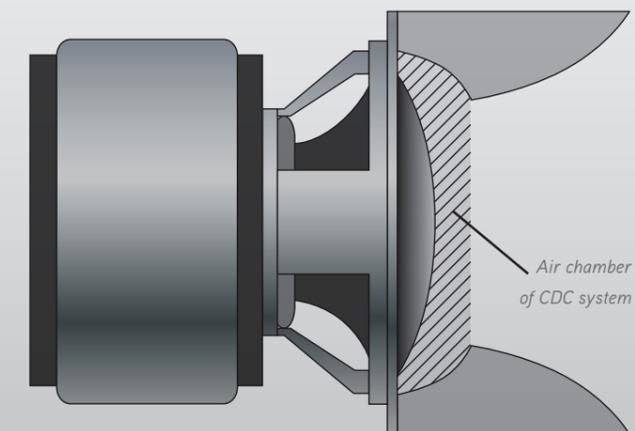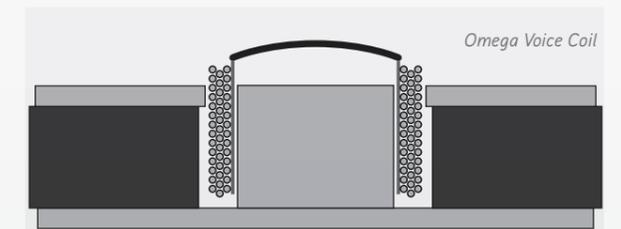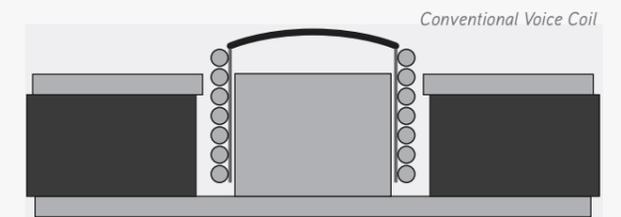

membrane. E.g. simply speaking the force the amplifier applies to the voice coil to follow exactly the musical signal. According to common knowledge the damping factor is determined by the quotient of load impedance (driver) and output impedance of the amplifier. An amplifier with an output impedance of 0,04 ohm will thus theoretically have a damping factor of 100 when connected to an 4 ohm speaker. But this is a purely theoretical figure! In real life the signal has to pass a speaker cable and the passive crossover components till it reaches the voice coil. Using a typical 5m long speaker cable with an W-resistance of 0,36 ohm and a resistance of the crossover coil of 0,6 ohm, the effective real damping factor will decrease to a value of only 4! Connecting the same amplifier/cable configuration to the Duo omega will result in a real damping factor of 18, which gives 4,5 times more control and precision! E.g. the control of the amp will increase by 450% and at the same time will reduce the negative effects of long speaker cables by 80%.


As a result the Omega drivers have more authority, less distortions and an excellent detailed response characteristics.

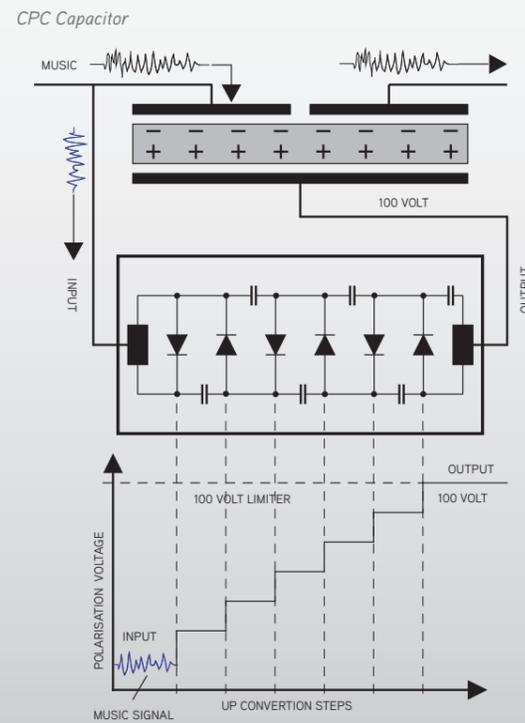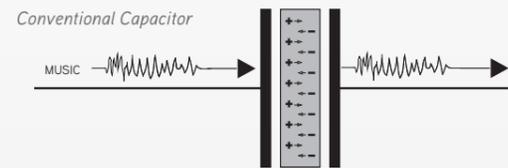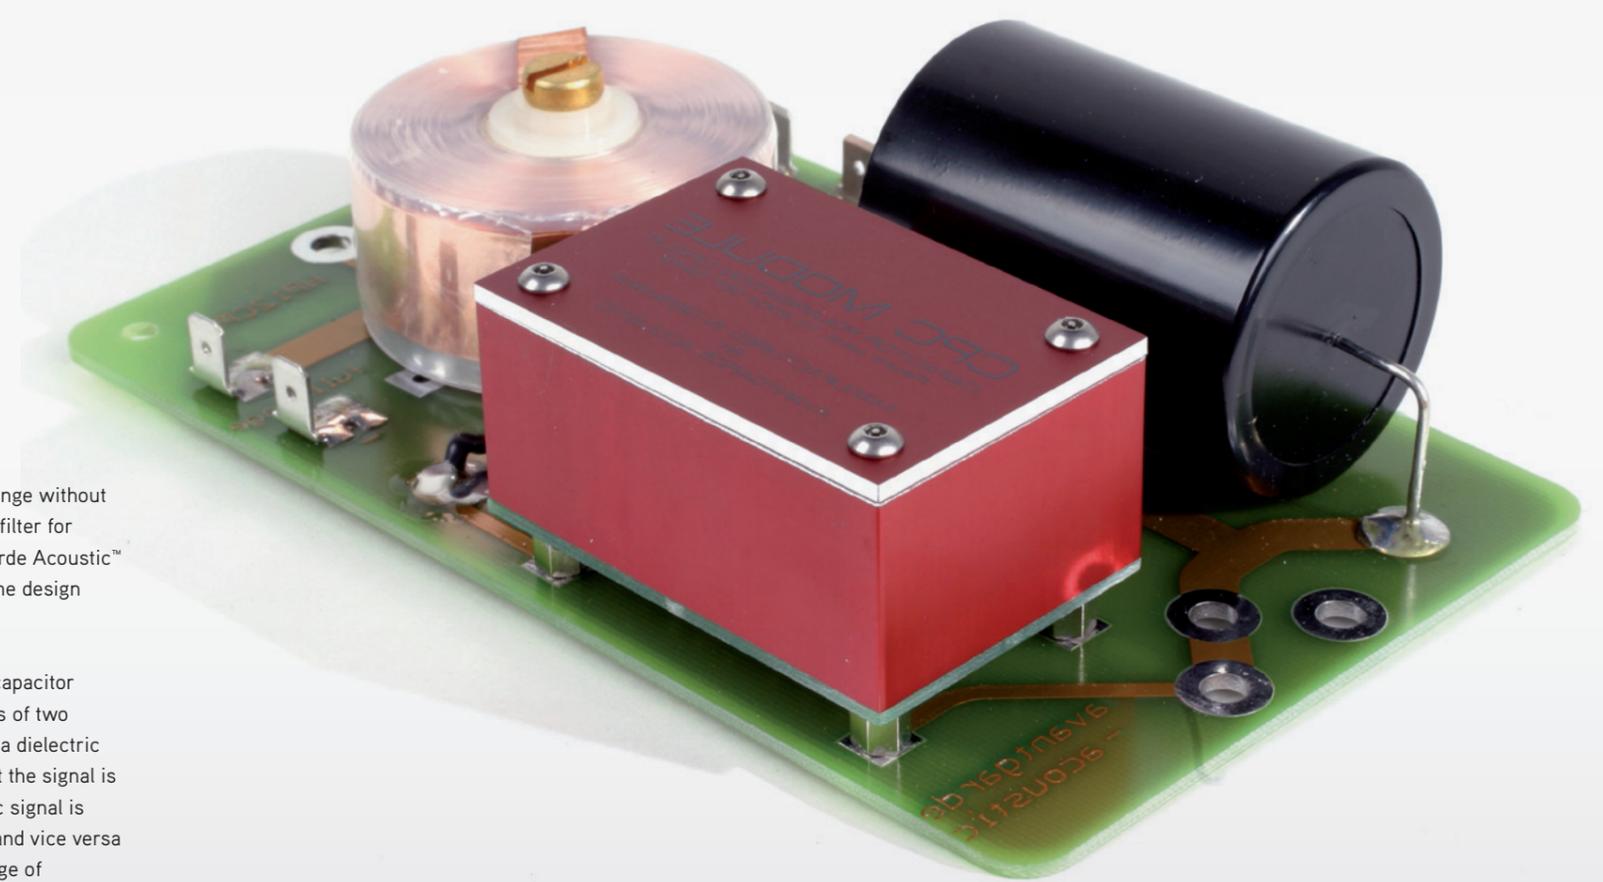

THE CPC CROSSOVER

Although the Omega midrange driver is running full range without any crossover, the Omega tweeter requires a passive filter for thermal protection. As with all their products Avantgarde Acoustic™ was taking a very puristic approach. Less is more is the design philosophy.

A potential limitation of any passive crossover is the capacitor required to filter low frequencies. A capacitor consists of two plates or conductors. As both plates are separated by a dielectric or insulator, the conductors have no direct contact but the signal is passed through a dielectric field. Every time the music signal is changing from the positive to the negative half-wave and vice versa the dielectric field gets inverted. The permanent change of direction of the field in a capacitor - a phenomenon called "dielectric memory effect" - causes distortions which get worse the closer the signal passes through the zero point and are at a max just when the electric field changes its direction.

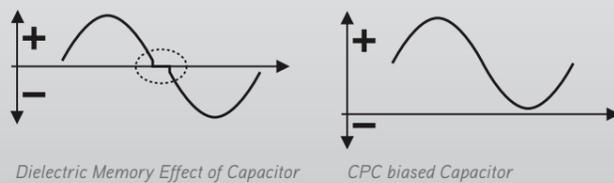

To avoid these distortions Avantgarde Acoustic™ uses with the "Capacitor Polarisation Circuit" an elaborate approach. Different to conventional capacitors the CPC-capacitor has multiple conductor-foils connected with a special electric layout shown in the attached graphics. The CPC module up-converts the income music signal to the required voltage to bias the conductors. Only the inner conductor is biased with DC. In the CPC module a voltage cascade through a network of diodes increases the voltage of the music signal to a multiple. This high direct current is then fed into the inner conductor. Furthermore is the diode circuit electrically

decoupled through a very high impedance transformer to avoid any backlash to the music signal. Already a view moments after turning on the music the CPC module has generated the required direct current to bias the capacitor. As the CPC diode cascade can build-up voltages by far beyond allowable levels, Avantgarde Acoustic™ has included a protective circuit to avoid overloading the capacitor.

The CPC biased capacitor has less distortions and can more precisely handle incremental signal variations.

## DUO OMEGA DRIVERS

Our bestseller



### THE MIDRANGE HORN DRIVER

The utmost care at choosing the drivers is the key to successfully transforming the theoretical advantages of the horn technology into an outstanding High End speaker. As mostly people focus on treble and bass response, Avantgarde Acoustic™ considers the midrange as the “heart” of each speaker system.

The Duo Omega offers the same technology as Avantgarde’s flagship model Trio. It features a sophisticated M2 omega driver with high impedance technology loading a 670 mm spherical midrange.

The M2 omega is a 170 mm (7 inch) midrange driver with a 100 mm (4 inch) dome especially developed for the Duo and optimized for a large, linear excursion.

Avantgarde Acoustic™ managed to increase the effective magnetic flow in the air-gap of the driver by eliminating the usual copper inlay of the pole-piece. The roll-off at higher frequencies caused by the higher inductivity of the voice coil and a specially designed dome was set to the exact crossover point of the tweeter.

Furthermore Avantgarde Acoustic™ added a powerful Alnico magnet to this new M2 omega development. This precious magnet material generates a powerful magnetic field which homogeneously controls the movement of the voice coil.

The M2 omega has a very low cut-off frequency with seamless and crossover-less integration to the subwoofer. The design of the dome ensures a phase-neutral radiation of the sound waves into the midrange horn SH6704 and wide bandwidth of the extended midrange down to 170 Hz.

The kevlar midrange cone of the M2 omega is coated with trillions of tiny microfibrres generating a “Velours Damping Effect”. This incrementally small fur of the VDE technology cone effectively reduces partial resonances of the cone itself. Furthermore the microscopic fibres of the VDE technology help to effectively absorb high frequency distortions.

The Avantgarde Acoustic™ proprietary CDC system features a controlled roll-off at 2,000 Hz, and allows us to completely eliminate all passive crossover components in the signal path. This way the M2 omega gets the pure and non-distorted full-range signal directly from the amplifier! The nominal impedance of the M2 omega is a staggering 18 ohm and the sensitivity is 107 dB (Watt/m).

## DUO OMEGA DRIVERS

Our bestseller



avantgarde  
ACOUSTIC



### THE TWEETER HORN DRIVER

As the performance of the M2 omega midrange driver achieved Trio levels, Avantgarde Acoustic™ was able to use their flagship tweeter H3 omega for the new Duo Omega system.

This exceptional driver combines the smoothness of an electrostatic driver and the power of a strong 1 inch horn driver. The H3 omega features a voice coil former made of Kapton with a minimised air gap, a special geometrical shape of the 17 ohm voice coil and an ultra light diaphragm.

The mere force of the 3 kg (6.5 lb) magnet on the voice coil guarantees 100% detail and precision even at low volume levels, and provides the Duo Omega with compression-free sound reproduction at extreme sound pressure levels.

With the spherical horn SH1801 the H3 omega offers an ultra wide bandwidth down to 900 Hz. Due to the passive crossover point being at 2,000 Hz Avantgarde Acoustic™ achieves a seamless smooth sound with incredible dynamic headroom.



## DUO OMEGA DRIVERS

Our bestseller



### THE SUBWOOFER DRIVER

The Duo Omega is supplied with the active subwoofer Sub 225, which is driven by two powerful 25 cm (10 inch) long-excursion drivers.

The 10-ND500 long excursion drive unit is characterized by its extremely high efficiency and utmost power handling capabilities. The extended controlled excursion is  $\pm 7$  mm. Exclusive neodym magnets with a special under-pole magnet topology are used to maximize the flux density in the air gap and to eliminate energy leakage of the magnetic field. The powerful neodym magnet with a very strong BL power factor and the very stiff but light membrane will ensure highest resolution and authority even with complex signals at extreme sound pressure levels.



# DUO OMEGA | AMPLIFIER

Our bestseller



## THE SUBWOOFER AMPLIFIER


The integrated active PA 106 electronics consists of a powerful 250 watt amplifier and an active frequency crossover. A forceful 330VA toroidal transformer and an energy reservoir of 60.000  $\mu$ F providing ample energy reserves and dynamic headroom.

In order to achieve full control to overcome the inertia of the driver mass, the PA 106 is equipped with Avantgarde's genuine adaptive motional feedback circuitry. These ultrafast analogue electronics compensate for signal deviations induced by the circuit and drivers in real-time. As a result the Sub 225 achieves an astonishingly flat frequency response down to 18 Hz! Furthermore, even at very low listening levels – when the music signal is too weak to overcome the inertia of the bass driver mass – the adaptive motional feedback circuitry will seamlessly increase its power output for a full and rich bass response.

The active crossover allows the adjustment of a number of parameters thus ensuring a very easy and fast installation of the system even in acoustically critical situations. A 3-position subsonic switch, variable settings for the input sensitivity and crossover frequencies make the Sub 225 extremely versatile. The Sub 225 can be remotely switched on/off using the 12V trigger signal.

The Sub 225 is driven via high power speaker terminals for direct connection to integrated amps, power amplifiers or receivers or alternatively via XLR terminals. The signal take-off is not only at high impedance, but is also balanced and transformer coupled. This floats the subwoofer ground, avoiding hum loops and eases connection to balanced and bridged amplifier designs.

The enclosure of the Sub 225 is constructed from 1.2 inch MDF (28 mm). Designed with a centrally located reinforcing stabilizer, the box construction is very rigid, avoiding resonances.

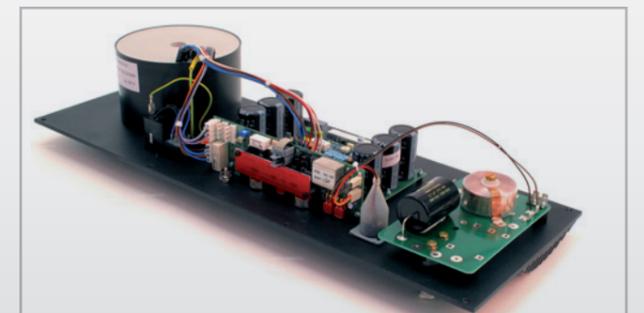

## DUO OMEGA CONSTRUCTION



Our bestseller



### MECHANICAL CONSTRUCTION

The midrange horn is mounted into a circular housing cylinder with a solid cast aluminium back cover on its back end. The tweeter is located in a sealed compartment in the upper part of the subwoofer enclosure.

The entire loudspeaker system is placed on a solid cast aluminium base frame. The spike assembly of the base frame – featuring solid 55 mm spikes and massive adjusting handles – are easily accessible from the top. Newly designed aluminium spacers with knurled head screws, connecting the frame rails with midrange housing cylinder and subwoofer.

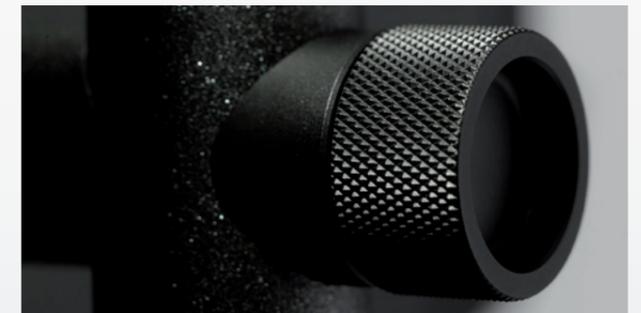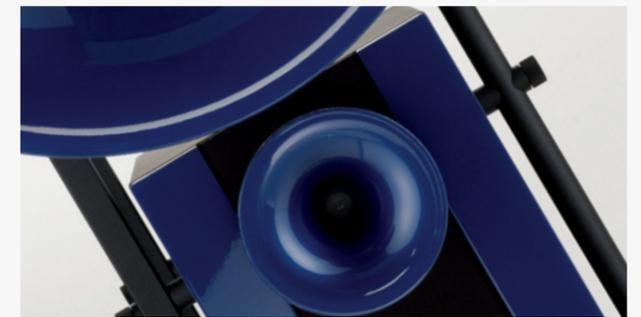

# DUO OMEGA | COLORS

Our bestseller



## EXAMPLES



## COLORS FOR THE HORNS AND PANELS

Stealth Nocturne Black <small>(panel only)</small>	Turmaline Vivid Black
Stealth Nocturne Grey	Shiny Citrine Orange <sup>1)</sup>
Diamond Crystal Silver	Ruby Brilliant Red
Akoya Pearl White	Sapphire Burma Blue
Light Amber Bronze	Light Topas Blue
Saona Beach Cream	Smaragd Pearl Green

A selection of ten standard colors is available for the horns. This includes eight metallic lacquer finishes, the uni-color „*Saona Beach Cream*“ finish and the moderne „*Stealth Nocturne Grey*“ finish. The special „*Shiny Citrine Orange*“ multi-layer coating is available as an option.

The front panels can be ordered in any of the above horn colors, plus the elegant „*Stealth Nocturne Black*“ finish. Four different wooden veneers are available. As standard with matte surface and optional in shiny piano lacquer finish.

On this page you will only find a small selection of thumbnails of the color combinations possible. For a better overview you should visit our website [www.avantgarde-acoustic.com](http://www.avantgarde-acoustic.com).

Here you can download a special *Color & Finishes.pdf* for each product. In this document you can find a nice overview of all front-panel combinations available for each of the horn colors. This will quickly guide you to your favorite horn-panel combinations.

## COLOR CONFIGURATOR

On our website [www.avantgarde-acoustic.com](http://www.avantgarde-acoustic.com) you will find as well a comprehensive color selection tool. Just go to the respective product within the *HORN*-section. Under *DESIGN* you can select the color of the horn and the color and veneer of the front panel. If you have found your favorite color combination, simply click on the download-button for a high resolution picture (6 mb).

## WOODEN VENEERS FOR THE PANELS

Flower Birdseye Maple <sup>2)</sup>	Tianshan Mystic Walnut <sup>2)</sup>
Hanami Lucent Cherrywood <sup>2)</sup>	Jacaranda Aura Rosewood <sup>2)</sup>

<sup>1)</sup> optional customized color  
<sup>2)</sup> optional available in high gloss piano lacquer finish

## DUO OMEGA | REVIEWS

Our bestseller



### TEST REVIEWS\*

"For the amplifier on duty, the 18-ohm impedance of the DUO OMEGA appears to remove the load altogether. Combine that with its extreme high sensitivity and the amplifier might think it's just idling while creating the most beautiful music for us. We now have more real music in the house which is effortless transmitted and completely free of constraints from the loudspeakers. The difference between the DUO and the DUO OMEGA is more than a small improvement. It is a major step towards TRIO Omega level." (6MOONS, Dr. Henk & Dr. Maja, HOLLAND)



"I'd rather not describe the sound any more. Silverly, subtle, elastic sound is exactly the sound spurted from these genuine horns. So it is not necessary to waste too many fine words about the advantages and elegance of the horn speaker. Avantgarde DUO OMEGA is the summit of what audiophiles have been pursued to reach at." (AUDIO, K. Nam, KOREA)



"The sound performance of the DUO has amazed us - an unforgettable experience. The sound image is like virtual reality, making the speakers to totally disappear. The sound stage has realistic dimensions, unlimited depth, life like height, accurate positions of each instrument, musicians and singers in the music scene. The listener does not only hear music, but is living, feeling and seeing the music exactly as it was performed." (HITECH, T. Katsenis, GREECE)



"These DUOs are one of the best speaker systems I've ever heard. I would have sworn Joan Armatrading was singing in my living room, but then so was Harry Christophers and his Sixteen, and Louis Armstrong, and Pat Metheny...and... and... and the neighbours kept finding excuses to visit..." (AUDIO QUARTERLY, C. Beeching, UK)



"The DUO breaks down the barriers between performance and reproduction in a way no conventional box loudspeaker can match. And such was the awesome tension and hair-curling realism. The exceptional involvement found me trawling through old favourites with new enthusiasm." (HIFI CHOICE, P. Messenger, UK)



"The DUOs sounded glorious, and far less colored than any other speaker I've heard employing horn-loaded drivers. The sound of massed choral voices was particularly sumptuous, the speaker conjuring an eerie apparition of the original event. A true achievement. Not to be missed." (GROOVENOISE.com, A. Chasin, USA)



### TEST REVIEWS\*

"With the DUO OMEGA the pins and needles come at once. Especially timbals and trumpets have the weight and authenticity of the real thing. What is truly decisive? We believe it's the incredible speed of the ultra-sensitive horns. This way even fine details of the recording have no chance to escape. One thing is for sure: where other speakers at the most reproduce hot air, the DUO OMEGA excels with drive, impact and structure. It's worth every penny." (HIFI TUNES, U. Heckers, GERMANY)



"The DUO OMEGA gives a whole new life to spherical horn architecture. Ning Kam's violin is precise and at the same time beautifully condensed. Just on the spot. Yet the energy of the treble penetrates with power like in reality. The proper tuning of these special tonal characteristics is what makes the DUO OMEGA so very special. The listening is more relaxed and at the same time involving, like having the centre front row seat in a concert hall." (AUDIO CITE, Zhong-Hao Tao, TAIWAN)



"My feet tap all the time. Tonal quality is unbelievably better. The tone of string and brass instruments is just so rich, pure and believable. Drums have real decay and timbre. Electronic instruments, though clearly electronic, now sound extended without being terribly harsh. In a nutshell: the overall presentation is smoother, richer and fuller with more palpability, detail and dynamism thrown in to boot. I cannot find a downside. The DUO OMEGA is thoroughly recommended." AUDIO ASYLUM, P. Earnshaw, USA)



"The DUO is a musical and beautifully sounding seducement. The DUO comes close to the listener, reaches him in every corner of his mind and floods the room with music - escape is impossible. This is how music reproduction should be: inspire emotions, disperse relaxation and convey energy. (HIFI TEST, V. Frech, GERMANY)



The DUOs do all of the normal audio tricks of imaging and soundstaging; plus a few not so common audio tricks like the realistic recreation of a living, breathing, soundspace; lifelike dynamics and life-size aural images. Musically they allow the emotional content to come through in spades, and they play the beat right. More than any other speaker that I have had the pleasure to enjoy, the DUOs immerse me in an musically convincing soundspace that is a near musical epiphany at every listening session. (AUDIO ASYLUM, J. Day, USA)



"Pure dynamic, which pulls your fillings. Pitch black bass, precise and with pressure. You clearly see the organ pipes in the depth of the room. Power and authority. The height of the sound imaging reaches from the floor up to the ceiling: Fantastic!" (HÖRERLEBNIS, M. Schmid, GERMANY)




\*) This is just a small selection of reviews. More quotes from international reviews for each product, can be downloaded on our website.



communication  
design  
award

2010



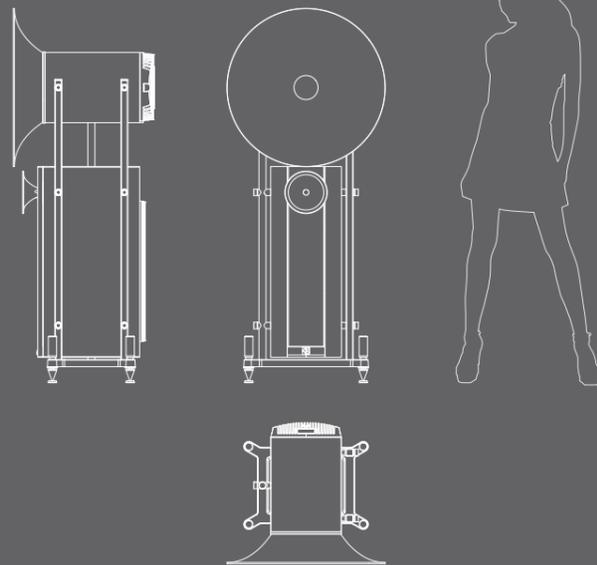

## SYSTEM DATA

Frequency response	satellite subwoofer
Power capacity	
Sensitivity (1 Watt / 1 m)	
Crossover frequencies	
Nominal Impedance	
Recommended amplification	
Recommended room size	
CDC (Controlled Dispersion Characteristic)	
CPC crossover (patent pend.)	

## HORN

Horn type	
Horn material	
Horn finish	
Dispersion type	
Horn mouth area	low mid range mid range high range
Horn mouth diameter	low mid range mid range high range
Horn length	low mid range mid range high range

## HORN DRIVERS

Diameter	low mid range mid range high range
Magnet material	low mid range mid range high range

## SUBWOOFER

Power Output (RMS)	250 Watts
Power capacitance	60.000 µF
Toroidal transformer	330 VA
REAL TIME feedback control	Yes
ADRIC circuit (patent pend.)	n/a
Active frequency crossover	variable 60 - 350 Hz
Subsonic filter, 3-positions	20 / 30 / 40 Hz
Automatic 12V remote On/Off	Yes
Smart Limiter	Yes
SoftStart circuit	Yes
Driver diameter	250 mm / 10 in
Number of drivers per module	2
Magnet material	Neodym

## DIMENSIONS/WEIGHT

Dimensions	width depth height (+/- 15 mm)
Weight	

170 - 20.000 Hz
18 - 350 Hz
100 Watts
> 107 dB
170 / 2.000 Hz
18 Ohm
> 10 Watts
> 20 m <sup>2</sup> / 200 ft <sup>2</sup>
Yes
Yes

Spherical horn
ABS injection mold
polished
180 Grad

n/a
0,353 m <sup>2</sup> / 547 in <sup>2</sup>
0,025 m <sup>2</sup> / 39 in <sup>2</sup>

n/a
670 mm / 26 in
180 mm / 7 in

n/a
370 mm / 15 in
85 mm / 3.3 in

n/a
170 mm / 7 in
25 mm / 1 in


n/a
Alnico
Ferrite

250 Watts
60.000 µF
330 VA
Yes
n/a
variable 60 - 350 Hz
20 / 30 / 40 Hz
Yes
Yes
Yes

250 mm / 10 in
2
Neodym

670 mm / 26 in
600 mm / 24 in
1.595 mm / 63 in
81 kg / 179 lbs

purity

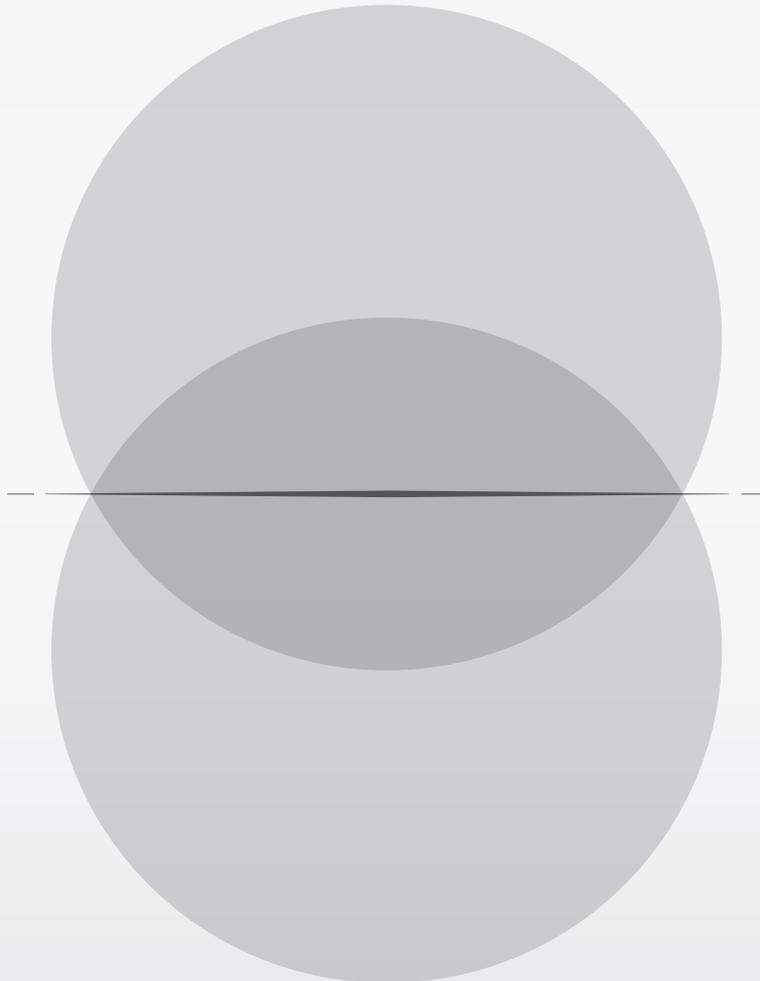

performance



**avantgarde**  
ACOUSTIC

Avantgarde Acoustic GmbH  
Nibelungenstraße 349  
D-64686 Lautertal  
Germany

Tel: +49.6254.306100  
info@avantgarde-acoustic.de  
www.avantgarde-acoustic.de